

LED PENDANT LIGHT



1618

Please read instructions before commencing installation and retain for future reference.


SPECIFICATIONS:

- Fitting: METAL-PC DIFFUSER Lamp type: LED 54W 3000K
- Protection against electric shock: CLASS I,. Requires earth connection.
- Ingress Protection: IP20. Protection against entry of solid objects greater than 12mm in diameter.
- Quality/Corrosive rating: QC21: Burning period: 12hrs/24hr cycle. Commercial use, indoor mainly - painted or plated metals. Not for use in corrosive environments.
- Driver: Included.



Connecting the Terminal Block

Connect main supply (brown - live, blue - neutral, green/yellow - earth) into terminal block making sure all connections are tight.

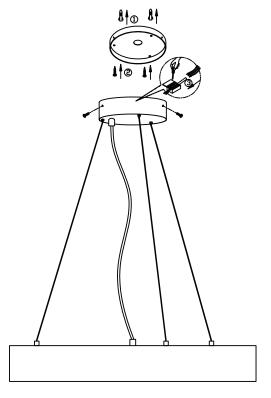

INSTALLATION INSTRUCTIONS:

Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician.

- Ensure mains supply is switched off.
- Insert masonry plugs into mounting surface.
- Fit mounting bracket onto mounting surface with self-tapping screws (1).
- Connect wires (2) according to color (White to White, Black to Black). Connect all earth lug together onto the crossbar with green screw to tight.
- Fit ceiling plate onto mounting bracket with nuts (3).
- Fit the plate(4) onto mounting bracket.
- Reconnect power.

WARNING:

Not for outdoor use or in wet conditions.







