


STAKE | DOWNLIGHT | WHITE

2110360101

nordlux®

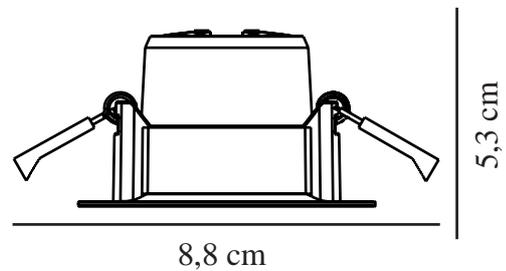

Voltage (V): 230 Volt
IP degree: IP20
Class (Class 1, Class 2, Class 3):
Class 2 (Double isolated)
Socket type: LED – Non-replaceable light source
Parallel connection: True

Primary material: Plastic
Secondary material: Metal
Length of the cable (cm): 14
Colour: White
IK degree: IK03

Height (cm) : 5.3
Built In Spot Diameter (cm) -
Hidden: 8.8
Mount directly into insulation:
False

EAN: 5704924006975
TUN: 2160502
Item Number: 2110360101

Pcs Per Master Carton: 3
Sales Box Height (cm): 13
Sales Box Width(cm): 13
Sales Box Depth (cm): 6.5
Sales Box Volume m³ : 0.0011
Product net weight (kg): 0.18

Brightness of light (Lumen): 450
Colour temperature (Kelvin): 2700
Ra-value : 80
Lifetime (hours): 20000
Beam angle (°) : 36
Candela (cd) (for directional lamp only): 900
Energy class: F
Actual watt (W): 6.1

- Provides a pleasant, glare-free light • Parallel connection possible (up to 15 downlighters)
 - External connector block/driver included
- Stepless dimmable by external dimmer • Easy installation • Long LED lifespan (20,000)

Stake is a glare-free downlight with an eye-friendly design, which means that you only see a pleasant, indirect light, and never directly into the light source. The light is dimmable with an external dimmer and parallel connection is possible (up to 15 downlights).

