


ROSALEE | DOWNLIGHT | BLACK

2410200103

nordlux®



Voltage (V): 220-240 Volt
IP degree: IP65/IP20

Class (Class 1, Class 2, Class 3):

Class 2 (Double isolated)

Socket type: LED – Non-

replaceable light source

Parallel connection: True

Primary material: Aluminium

Secondary material: Plastic

Colour of the cable: Black

Length of the cable (cm): 30

Surface material of the cable:

Plastic

Is the cable replaceable: False

Colour: Black

IK degree: IK02

Height (cm) : 4.2

Width (cm): 8.6

Lenght (cm): 8.6

Mount directly into insulation: True

EAN: 5704924017926

TUN: 2367732

Item Number: 2410200103

Pcs Per Master Carton: 3

Sales Box Height (cm): 13

Sales Box Width(cm): 13

Sales Box Depth (cm): 7

Sales Box Volume m³ : 0.0012

Product net weight (kg): 0.2114

Brightness of light (Lumen): 600

Colour temperature (Kelvin):

2700/3000/4000

Ra-value : 80

Lifetime (hours): 50000

Beam angle (°) : 36


Candela (cd) (for directional

lamp only): 1000

Energy class: D

Actual watt (W): 7

- High IP degree (IP65)
- Can be mounted directly into insulation
- Low installation height
- Choose between warm-, white- and cold light when mounting
- Long LED lifespan (50,000 hours)

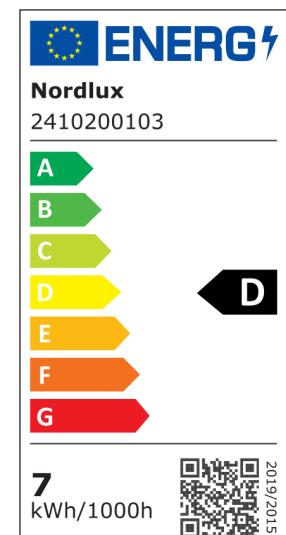

Rosalee is an elegant downlight with a high IP degree. Choose between warm- (2700K), white- (3000K) or cold (4000K) light with the built in kelvin switch. The downlight can be mounted directly into insulation and has a very low installation height.