




MONOLO 1-KIT | DOWNLIGHT | WHITE

2510300101

nordlux®

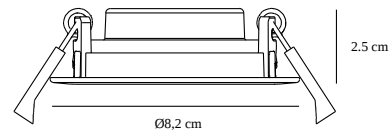

Voltage (V): 220-240 Volt
IP degree: IP20
Class (Class 1, Class 2, Class 3):
Class 2 (Double isolated)
Socket type: LED Module
Parallel connection: True

Primary material: Plastic
Secondary material: Plastic
Colour: White

Height (cm) : 2.5
Length (cm): 8.2
Mount directly into insulation:
False
Tilt Angle (°): 30

EAN: 5704924023170
TUN: 2427474
Item Number: 2510300101
Pcs Per Master Carton: 3

Sales Box Height (cm): 13
Sales Box Width (cm): 13
Sales Box Depth (cm): 5.5
Sales Box Volume m³ : 0.0009
Product net weight (kg): 0.095

Brightness of light (Lumen): 450
Colour temperature (Kelvin): 3000
Ra-value : 80
Lifetime (hours): 30000
Beam angle (°) : 36
Energy class: E
Actual watt (W): 4.8

- Tool-free installation • 3-step Moodmaker™ dimming using your standard wall switch • Long LED lifespan (30,000 hours)
- Tiltable, directional light • 5-year LED guarantee

Monolo is a downlight with an integrated LED that can be dimmed in three steps using your regular wall switch. The light can be tilted in any direction you choose.

