


MONOLO 3-KIT | DOWNLIGHT | BLACK

2510310103

nordlux®

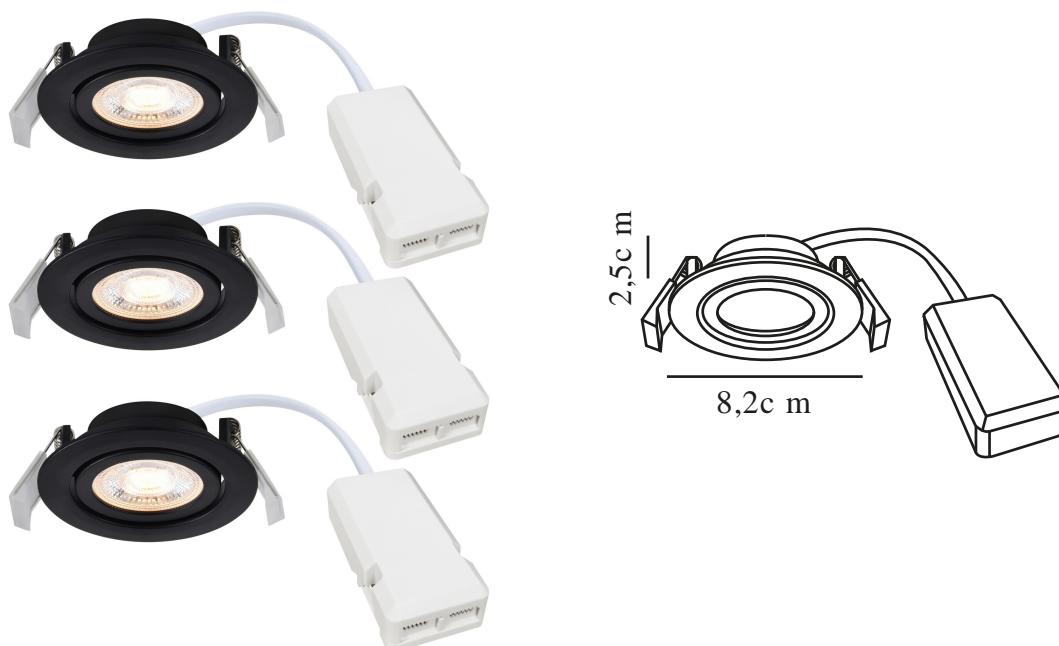

Voltage (V): 220-240 Volt

IP degree: IP20

Class (Class 1, Class 2, Class 3):

Class 2 (Double isolated)

Socket type: LED – Non-replaceable light source

Parallel connection: True

Primary material: Plastic

Secondary material: Plastic

Colour: Black

Height (cm) : 2.5

Length (cm): 8.2

Mount directly into insulation:

False

Tilt Angle (°): 30

EAN: 5704924023200

TUN: 2427477

Item Number: 2510310103

Pcs Per Master Carton: 3

Sales Box Height (cm): 28.5

Sales Box Width (cm): 10

Sales Box Depth (cm): 7.8

Sales Box Volume m³ : 0.0022

Product net weight (kg): 0.285

Brightness of light (Lumen): 450

Colour temperature (Kelvin): 3000

Ra-value : 80

Lifetime (hours): 30000

Beam angle (°) : 36

Energy class: E

Actual watt (W): 4.8

- Tool-free installation • 3-step Moodmaker™ dimming using your standard wall switch • Long LED lifespan (30,000 hours)
- Tilttable, directional light • 5-year LED guarantee



Monolo is a downlight with an integrated LED that can be dimmed in three steps using your regular wall switch. The light can be tilted in any direction you choose. The set includes three spots.