


CAMBIO 3-KIT | SURFACE DOWNLIGHT | ALUMINIUM

79440029

nordlux®

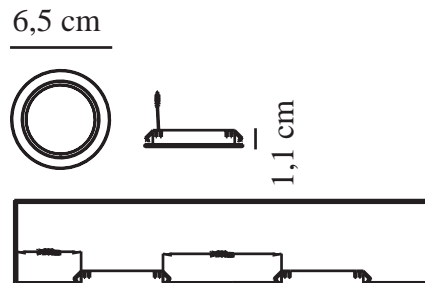

Voltage (V): 12 Volt
IP degree: IP20/23
Class (Class 1, Class 2, Class 3):
Class 3 (Low voltage)
Socket type: LED – Non-
replaceable light source
Switch placement: On the cable
Parallel connection: False

Primary material: Plastic
Secondary material: Metal
Colour of the glass - Hidden: Clear
Colour of the cable: White
Length of the cable (cm): 180
Surface material of the cable:
Plastic
Colour: Aluminium

Height (cm) : 1.1
Built In Length (cm) - Hidden: 6.2
Built In Spot Diameter (cm) -
Hidden: 6.5
Built In Width (cm) . Hidden: 6.2

EAN: 5701581341784
TUN: 1850682

Item Number: 79440029
Pcs Per Master Carton: 3
Sales Box Height (cm): 19.7
Sales Box Width(cm): 6
Sales Box Depth (cm): 21.2
Sales Box Volume m³ : 0.0025
Product net weight (kg): 0.22

Brightness of light (Lumen): 200
Colour temperature (Kelvin): 3000
Ra-value : 80
Lifetime (hours): 20000
Beam angle (°) : 90
Candela (cd) (for directional
lamp only): 149
Energy class: F
Actual watt (W): 8

- Ideally suited for under cabinet lighting • Can be mounted directly into insulation •
- Connector block included
- Recessed and surface mounting • Long LED lifespan (20,000 hours)

Set with three recessed lights with frame in plastic. The spotlights are suitable for the kitchen, or in places where they do not occupy unnecessary space – the set includes extension rings and LED diode light bulbs with low energy consumption and a long life.

ENERGY

Nordlux
79440029

A
B
C
D
E
F
G

1
kWh/1000h

2019/2015