
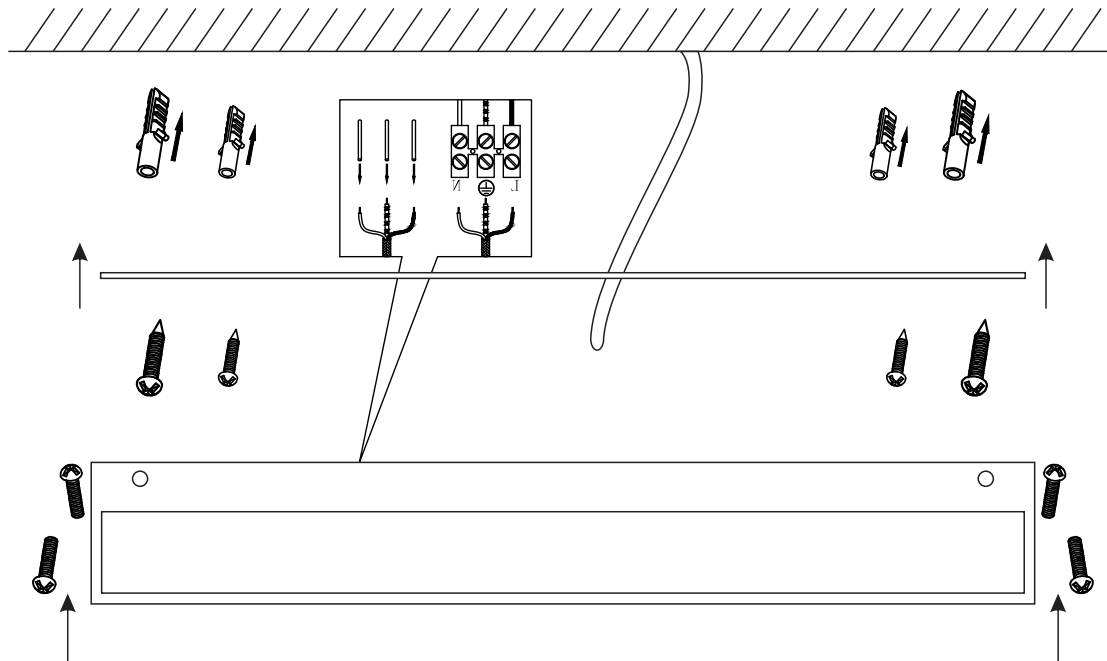


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

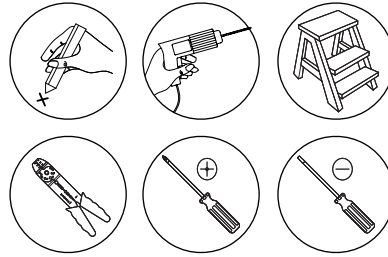

OUTDOOR WALL LIGHT

E227

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Aluminum | Tempered Glass
- **Lamp Type:** LED | 30W | 3000K | 2263Lm | CRI 80
- **Ingress Protection:** IP65 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

- ⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.
- Ensure the main supply is switched off.
- Unscrew and remove the lighting fixture's back from the body.
- Pull the power cable out of the wall and pass it through the mounting back.
- Place the wall anchors on the mounting surface and fix the back to the wall by screwing with the screws.
- On the back of the lighting fixture body, find and unscrew the cap from the small terminal block.
- Join the wires and secure them tightly by passing them through the hole in the terminal cover box.
- Screw the cap tightly into its box and secure the lighting fixture's body to the mounting surface with the screws.
- Reconnect power.

WARNING

- ⚠ Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.



LED

CRI 80

IP 65

0.5m

