

ESCAPE ROUTE SIGN FOR RECESSED MOUNTING STELAR-V



← → 30m



- Exclusive design orientated ceiling recessed mounting escape route sign fixture
- Either non-maintained/ maintained (NM/M) or centralised (C) emergency lighting available in all following versions:


- **AUTOTEST** (-AT)
- **DALI**
- **CENTRAL BATTERY** (C.STELAR) for **non-addressable CBS**
- **CENTRAL BATTERY** (C.STELAR-DALI) for **DALI CBS**
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034

Design:

- plastic body in white with "click' mounting springs
- plexi diffuser with a legend / picto (must be ordered separately)
- Elegantné dizajnové stropné núdzové svietidlo pre označenie smeru úniku určené pre zapustenú montáž do stropu
- Pre netrvale/trvalé (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách:


- **AUTOTEST** (-AT)
- **DALI**
- **CENTRAL BATTERY** (C.STELAR) pre **neadresovateľné CBS**
- **CENTRAL BATTERY** (C.STELAR-DALI) pre **DALI CBS**
- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
- konštrukcia:

- plastové teleso s pružinami na jednoduchú montáž do stropu
- závesné plexi s piktogramom (musí byť objednané samostatne podľa požadovaného typu piktogramu)

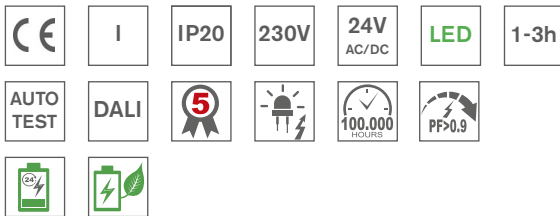

Input Power:

- 4,6W/ 5,4VA (maintained M/1h)
- 2,2W/ 4,3VA (non-maintained NM/1h)
- 2,7W/ 4,6VA (CBS)

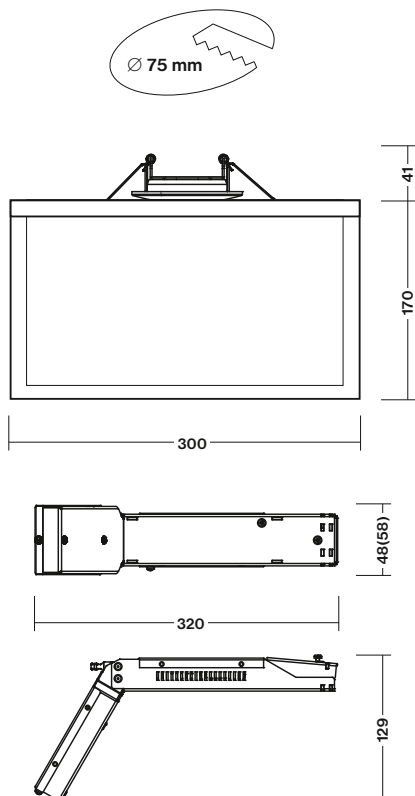

STANDARD FEATURES


STANDARDNÁ VÝBAVA

- **High efficient (170lm/W, 5000K) LONGLIFE LEDs (>100.000h)**
- **Advanced Electronics**
- **LONGLIFE LiFePo4 battery**
- **Installation Mode** (battery protection, for more details look up page No.17)
- **Intelligent battery charging**
- Special layered suspended legend for perfect smooth pictogram illumination
- LEDs indicating presence of power supply and signaling failures & TEST button
- **vysoko účinné LED (170lm/W, 5000K) so životnosťou min.100000h**
- **progresívna elektronická jednotka**
- **LONGLIFE LiFePo4 batéria**
- **Inštaláčny mód** (ochrana batérie, pozri aj str.17)
- **Inteligentné nabíjanie batérie**
- špeciálne vrstvené závesné plexi pre perfektné rovnomerné osvetlenie piktogramu
- signalizácia LED a TEST tlačítko

OPTIONAL ACCESSORIES

PRÍPLATKY


- **Special suspended plexi with layered design for perfect uniform illumination of legend - must be ordered as a separate item (look up also page No.103)**
- **špeciálne vrstvené závesné plexi pre rovnomerné osvetlenie piktogramu na jeho celej ploche (plexi musí byť objednané samostatne podľa želaného piktogramu- pozri aj str.103)**

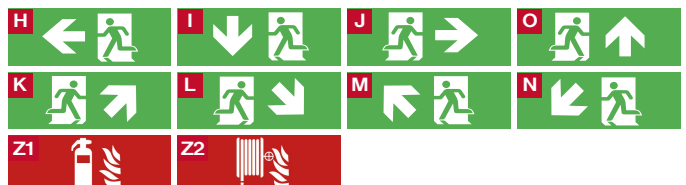

* Dimmensions in the bracket are valid for 3h versions
* rozmery v zátvorke platia pre 3h verzie



- Cut the mounting hole size 75mm in diameter
 - Connect the mains
 - CLICK the fixture in the hole
- vyrež montážny otvor 75mm priemer
 - pripoj sieťové vodiče
 - následne "NA-KLIKNI" svietidlo do otvoru

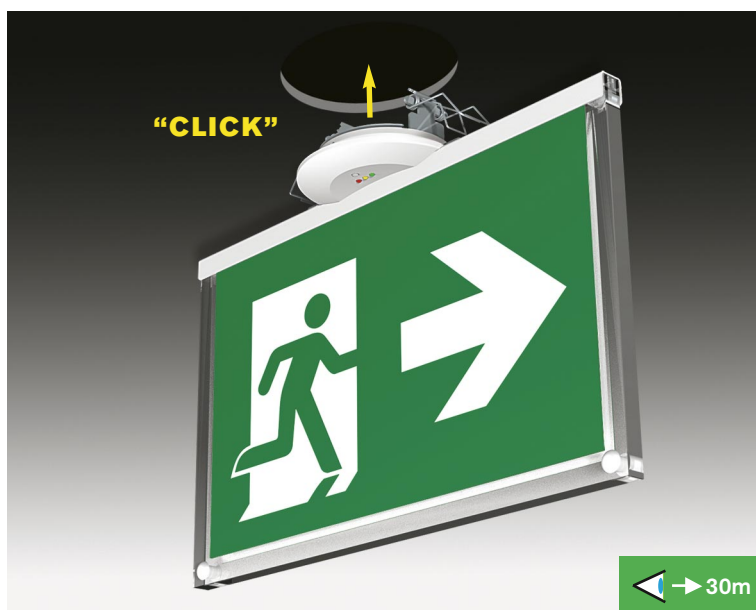

AUTOTEST -AT NM/M

Type	Version	Light Source	Battery	Order Code	Weight
STELAR-V-AT.1h	Only body, plexi is separate	HighPower LED	LiFePo4 6,4V/1,0Ah	345-B-001-04-00-01	0,6 kg
STELAR-V-AT.3h	Only body, plexi is separate	HighPower LED	LiFePo4 6,4V/2,0Ah	345-B-002-04-00-01	0,7 kg

DALI SELF-CONTAINED

Type	Version	Light Source	Battery	Order Code	Weight
STELAR-V-DALI.1h	Only body, plexi is separate	HighPower LED	LiFePo4 6,4V/1,0Ah	345-B-004-04-00-01	0,6 kg
STELAR-V-DALI.3h	Only body, plexi is separate	HighPower LED	LiFePo4 6,4V/2,0Ah	345-B-005-04-00-01	0,7 kg

CENTRAL BATTERY (CBS)

Type	Version	Version	Light Source	Order Code	Weight
C.STELAR-V 230V AC/DC	Only body, plexi is separate	CBS NON-ADDRESSABLE	HighPower LED	345-B-010-00-00-01	0,5 kg
C.STELAR-V 24V AC/DC	Only body, plexi is separate	CBS NON-ADDRESSABLE	HighPower LED	345-B-011-00-00-01	0,5 kg

DALI CENTRAL BATTERY (CBS)

Type	Version	Version	Light Source	Order Code	Weight
C.STELAR-V-DALI 230V AC	Only body, plexi is separate	DALI CBS	HighPower LED	345-B-012-00-00-01	0,5 kg




• It is not included in standard package.
It must be ordered as separate item !

- Viewing Distance: 30m
- Complying ISO7010
- Legend luminance >500cd/m² (white)

• Nie je súčasťou štandardného balenia svetidla.
Musí byť objednané ako samostatná položka !

- rozoznateľnosť piktogramu: 30m
- v súlade s ISO7010
- jas piktogramu >500cd/m² (biela)

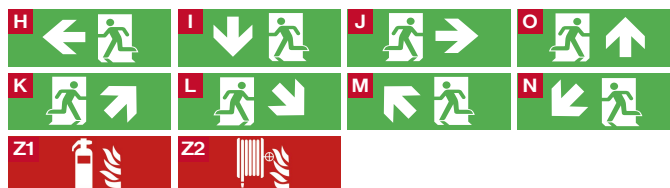

Suspended plexi Accessory

Optional Item / Príplatok	Order Code / Objednávaci kód
Double sided plexi with legend H/J	345-B-000-02-00-01
Double sided plexi with legend I	345-B-000-02-00-02
Single sided plexi with legend H	345-B-000-01-00-03
Single sided plexi with legend I	345-B-000-01-00-04
Single sided plexi with legend J	345-B-000-01-00-05
Double sided plexi with legend K/M	345-B-000-02-00-06
Double sided plexi with legend L/N	345-B-000-02-00-07
Single sided plexi with legend K	345-B-000-01-00-08
Single sided plexi with legend L	345-B-000-01-00-09
Single sided plexi with legend M	345-B-000-01-00-10
Single sided plexi with legend N	345-B-000-01-00-11
Single sided plexi with legend O	345-B-000-01-00-12
Double sided plexi with legend O	345-B-000-02-00-13
Double sided plexi with legend Z1	345-B-000-02-00-14
Double sided plexi with legend Z2	345-B-000-02-00-15

Závesné plexi s piktogramom

Príplatok	Objednávaci kód
Obojstranné plexi s piktogramom H/J	345-B-000-02-00-01
Obojstranné plexi s piktogramom I	345-B-000-02-00-02
Jednostranné plexi s piktogramom H	345-B-000-01-00-03
Jednostranné plexi s piktogramom I	345-B-000-01-00-04
Jednostranné plexi s piktogramom J	345-B-000-01-00-05
Obojstranné plexi s piktogramom K/M	345-B-000-02-00-06
Obojstranné plexi s piktogramom L/N	345-B-000-02-00-07
Jednostranné plexi s piktogramom K	345-B-000-01-00-08
Jednostranné plexi s piktogramom L	345-B-000-01-00-09
Jednostranné plexi s piktogramom M	345-B-000-01-00-10
Jednostranné plexi s piktogramom N	345-B-000-01-00-11
Jednostranné plexi s piktogramom O	345-B-000-01-00-12
Obojstranné plexi s piktogramom O	345-B-000-02-00-13
Obojstranné plexi s piktogramom Z1	345-B-000-02-00-14
Obojstranné plexi s piktogramom Z2	345-B-000-02-00-15



- You can create homogenous emergency lighting design by using of combination of STELAR3 and LEDLUX-SPOT3-V fixtures. All of them are based on the same design.
- **LEDLUX-SPOT3-A-V** fixtures are designed for escape corridor / route illumination (for more details please refer to page No.109 / pozri aj str.109)
- **LEDLUX-SPOT3-B-V** fixtures are designed for open areas, anti-panic lighting (for more details please refer to page No.109 / pozri aj str.109)

