

CEILING MOUNTING DOUBLE-SIDED ESCAPE ROUTE SIGN TRENDLUX3-TOP




• Equisite IK10 IP65 ceiling mounting double-sided LED fixture with perfect light distribution for non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:

- **AUTOTEST** (-AT)
- **DALI**
- **CENTRAL BATTERY** (C.TRENDLUX3) for **non-addressable CBS**
- **CENTRAL BATTERY** (C.TRENDLUX3-DALI) for **DALI CBS**
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
- Design: PC impact resistant body IK10

• kompaktné a odolné núdzové svetidlo s perfektnou distribúciou svetla pre netrvalé (NM) alebo pre trvalé/netrvalé (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:


- **AUTOTEST** (-AT)
- **DALI**
- **CENTRAL BATTERY** (C.TRENDLUX3) pre **neadresovateľné CBS**
- **CENTRAL BATTERY** (C.TRENDLUX3-DALI) pre **DALI CBS**

• spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
• konštrukcia: IK10 teleso z nerozbitného PC

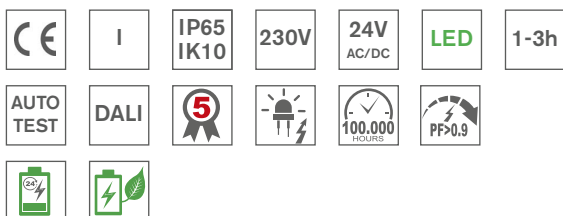

Input Power:

- 4,6W/ 5,4VA (maintained M/1h)
- 2,2W/ 4,3VA (non-maintained NM/1h)
- 2,7W/ 4,6VA (CBS)

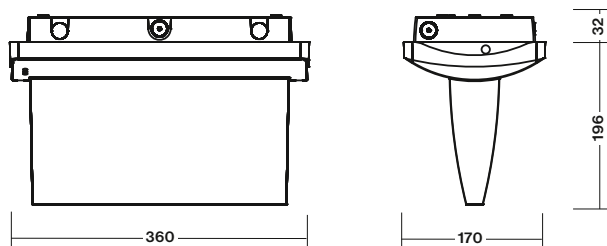

STANDARD FEATURES

ŠTANDARDNÁ VÝBAVA

- **High efficient MidPower (170lm/W) LONGLIFE LEDs 5000K (>100.000h)**
- **Advanced Electronics**
- **LONGLIFE LiFePo4 battery**
- **Installation Mode** (battery protection, for more details look up page No.17)
- **Intelligent battery charging**
- LEDs indicating presence of power supply and signaling failures & TEST button
- Self-adhesive pictograms / Legends (look up also page No.45)
- **vysoko účinné MidPower LED 5000K (170lm/W) so životnosťou min.100000h**
- **progresívna elektronická jednotka**
- **LONGLIFE LiFePo4 batéria**
- **Inštaláčny mód** (ochrana batérie, pozri aj str.17)
- **Inteligentné nabíjanie batérie**
- signalizácia LED a TEST tlačítko
- samolepiace piktogramy (pozri tiež str.45)




OPTIONAL ACCESSORIES

PRÍPLATKY


- Self-adhesive legends (look up page No.45)
- Wall mounting or pendant brackets (look up page No.45)
- samolepiace piktogramy (pozri str.45)
- nástenná alebo stropná závesná konzola (pozri str.45)



Optional Foil Legends
Príplatkový piktogram
(look up also page No.45)

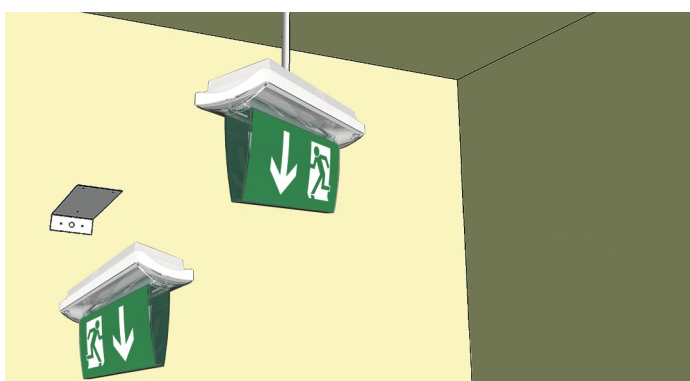

Optional Brackets
Príplatkové konzoly
(look up also page No.45)

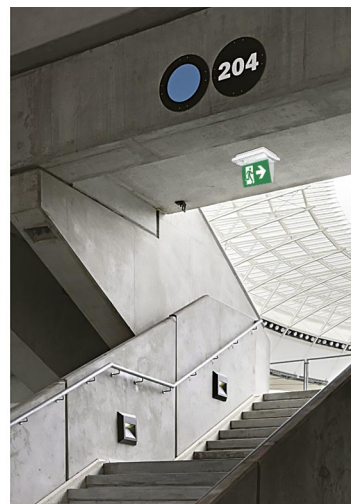

AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-TOP-AT.1h	NM/M	1h	LED	NA	LiFePo4 6,4V/1,0Ah	341-B-201-04-00-00	1,8 kg
TRENDLUX3-TOP-AT.3h	NM/M	3h	LED	NA	LiFePo4 6,4V/2,0Ah	341-B-202-04-00-00	1,9 kg

DALI SELF-CONTAINED

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-TOP-DALI.1h	NM/M	1h	LED	NA	LiFePo4 6,4V/1,0Ah	341-B-204-04-00-00	1,9 kg

DALI CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-TOP-DALI 230V AC	DALI CBS	LED	NA	341-B-209-00-00-00	1,5 kg

CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-TOP 230V AC/DC	CBS NON-ADDRESSABLE	LED	NA	341-B-210-00-00-00	1,5 kg
C.TRENDLUX3-TOP 24V AC/DC	CBS NON-ADDRESSABLE	LED	NA	341-B-211-00-00-00	1,5 kg


**Options:**

- Self-adhesive legends ISO7010 (versions H, I, J, O are included, all other must be ordered separately if needed, order codes are below)
- Viewing Distance: 35m
- Legend luminance >500cd/m² (white)

Príplatky:

- samolepiace piktogramy podľa ISO7010 (verzie H,I,J,O sú štandardne pribalené k svietidlu, ostatné musíte objednať samostatne ak sú potrebné-viď obj.kódy nižšie)
- rozoznatelnosť piktogramu: 35m
- jas piktogramu >500cd/m² (white)

Optional Item / Priplatok	Order Code / Objednávaci kód
Legend "H" / Piktogram typ "H"	included in standard package / pribalené
Legend "I" / Piktogram typ "I"	included in standard package / pribalené
Legend "J" / Piktogram typ "J"	included in standard package / pribalené
Legend "K" / Piktogram typ "K"	341-B-000-01-00
Legend "L" / Piktogram typ "L"	341-B-000-02-00
Legend "M" / Piktogram typ "M"	341-B-000-03-00
Legend "N" / Piktogram typ "N"	341-B-000-04-00
Legend "O" / Piktogram typ "O"	included in standard package / pribalené
Legend "Z1" / Piktogram typ "Z1"	341-B-000-05-00
Legend "Z2" / Piktogram typ "Z2"	341-B-000-06-00
Blind Legend / folia bez pikto"X"	341-B-000-07-00

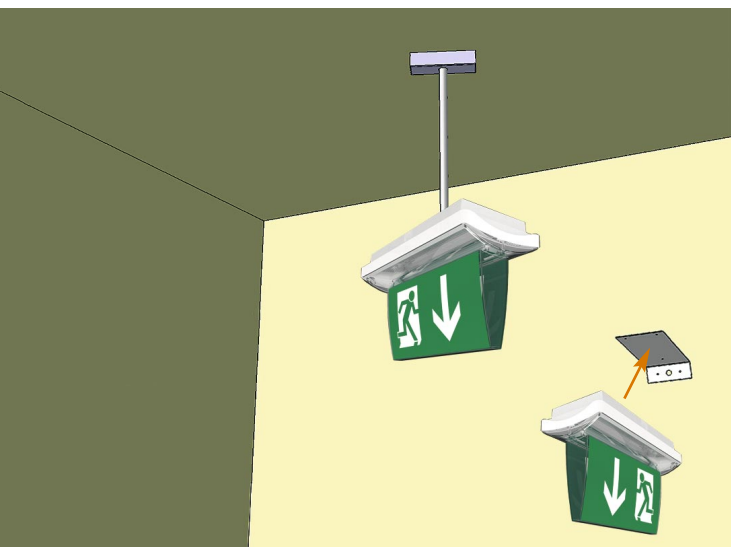**Options:**

- Wall / Ceiling Pendant mounting brackets

Príplatky:

- nástenná / stropná závesná konzola

Optional Item / Priplatok	Order Code / objednávací kód
Wall mounting bracket / nástenná konzola	277-B-200-01-00
Pendant bracket 0,5m / závesná konzola 0,5m	277-B-207-01-00
Pendant bracket 1,0m / závesná konzola 1,0m	277-B-208-01-00
Pendant bracket 1,5m / závesná konzola 1,5m	277-B-209-01-00

Light source	LED 5000K >500cd/m ² (white luminance) >200cd/m ² (average luminance)
Installed load	4.6W/5.4VA (maintained M) 2.2W/4.3VA (non-maintained NM) 2.7W/4.6VA (CBS)
Protection type	IP65 IK10
Housing material	Impact resistant polycarbonate
Viewing distance	35m

Industrial Area Emergency Lighting Application

